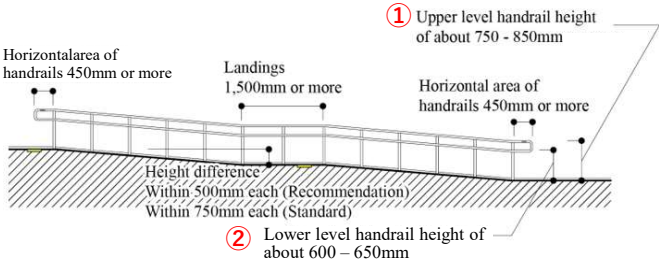


List of errata for Tokyo 2020 Accessibility Guidelines

V.1.0 2019.02.28

No.	Page		Incorrect	Correct
1	2-21	Figure 4: Ramps (example)	Upper level handrail height of about 750-850mm or more	Upper level handrail height of about 750-850mm or more
2			Upper level handrail height of about 600-650mm or more	Lower level handrail height of about 600-650mm or more
				 <p>Correct figure</p>
3	2-67	Reference table 45: Space for wheelchair users	*1,900mm x 1,200mm (Tokyo Metropolitan ordinance)	*1_900mm x 1,200mm (Tokyo Metropolitan ordinance)
4	2-100		2.4.2.3 Contrast	2.4.2.2.1 Contrast
5	2-100		2.4.2.4 Type Colour	2.4.2.2.2 Type Colour
6	2-101		2.4.2.5 Point Size	2.4.2.2.3 Point Size
7	2-101		2.4.2.6 Leading	2.4.2.2.4 Leading
8	2-101		2.4.2.7 Font Type	2.4.2.2.5 Font Type
9	2-101		2.4.2.8 Font Heaviness	2.4.2.2.6 Font Heaviness
10	2-101		2.4.2.9 Letter Spacing	2.4.2.2.7 Letter Spacing
11	2-101		2.4.2.10 Margins & Columns	2.4.2.2.8 Margins & Columns
12	2-101		2.4.2.11 Paper Finish	2.4.2.2.9 Paper Finish
13	2-102		2.4.2.12 Clean Design & Simplicity	2.4.2.2.10 Clean Design & Simplicity
14	2-102		2.4.2.13 Braille	2.4.2.3 Braille
15	2-102		2.4.2.14 Audio Recording Media	2.4.2.4 Audio Recording Media
16	2-102		2.4.2.15 Electronic Documents	2.4.2.5 Electronic Documents
17	2-102		2.4.2.16 Video/DVD/CD Releases	2.4.2.6 Video/DVD/CD Releases
18	2-114~115	2.5.2.7 Signage for Accessible Parking	An international symbol of access shall be provided on both the ground/floor (best practice is 750mm ²) and vertically in front of each parking space, no lower than 1,500mm so that it can be seen over a car.	An international symbol of access shall be provided on both the ground/floor (best practice is 750mm×750mm) and vertically in front of each parking space, no lower than 1,500mm so that it can be seen over a car.
19	2-124	2.5.4.3.2 Aircraft Gates	Gate ramp gradient should not exceed 1/12. Further, landing standards are stipulated in the reference table 12.	Gate ramp gradient should not exceed 1/12. Further, landing standards are stipulated in the reference table 13.